

CABLE GRIPS

They facilitate work and can pull one or several cables at the same time.


CHOICE OF PULLING GRIP

In order to choose the right pulling grip, you should first calculate the diameter of the cable or all of the cables.


The resulting value should always be within the grip's capacity values.

Always check the expected workload.

SINGLE CABLE

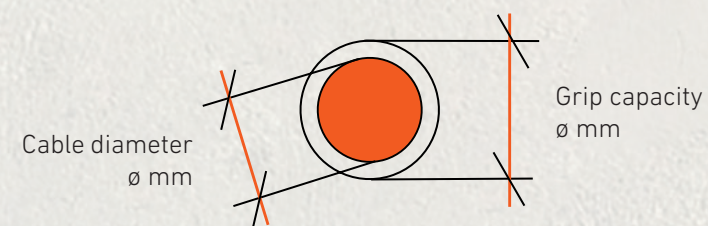

SEVERAL CABLES

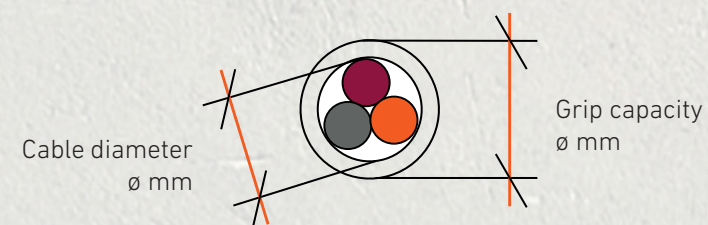

We can manufacture the grip you need to suit your specifications.

Please consult us.

HOUSEHOLD PULLING GRIPS

Ø DIAMETER	Ø CAPACITY PULLING GRIP (one or several cables)	LENGTH		LOAD		NO. STRANDS PULLING GRIP	NO. TIPS	CABLE TYPE	CABLE Ø	REF.	PRICE €/u.
		TOTAL	WORKING	WORKING	BREAK-ING						
6 mm	4-9 mm	190 mm	120 mm	100 kg	120 kg	1	4	1x7+0	0.65 mm	4.7001.000	25.00
	9-15 mm	230 mm	210 mm	100 kg	120 kg	1	6	1x7+0	0.65 mm	4.7001.001	25.00

INDUSTRIAL PULLING GRIPS

CLOSED PULLING GRIPS

Ø PULLING GRIP CAPACITY (one or several cables)	LENGTH		LOAD		NO. STRANDS PULLING GRIP	NO. TIPS	CABLE TYPE	CABLE Ø	REF.	PRICE €/u.
	TOTAL	WORKING	WORKING	BREAKING						
15-20 mm	700 mm	300 mm	750 kg	1,600 kg	2	8	1x19+0	1.0 mm	4.7002.000	65.00
20-25 mm	800 mm	400 mm	750 kg	1,600 kg	2	8	1x19+0	1.0 mm	4.7002.001	80.00
25-45 mm	1300 mm	750 mm	1,500 kg	4,600 kg	2	8	1x19+0	1.5 mm	4.7002.002	95.00
45-60 mm	1,400 mm	900 mm	2,500 kg	5,500 kg	2	8	1x19+0	2.0 mm	4.7002.003	110.00
60-80 mm	1,900 mm	1,200 mm	2,500 kg	5,500 kg	2	8	1x19+0	2.5 mm	4.7002.004	125.00
80-100 mm	2,000 mm	1,300 mm	3,000 kg	6,000 kg	2	8	1x19+0	3.0 mm	4.7002.005	145.00

OPEN PULLING GRIPS

Ø PULLING GRIP CAPACITY (one or several cables)	LENGTH		LOAD		NO. STRANDS PULLING GRIP	NO. TIPS	CABLE TYPE	CABLE Ø	REF.	PRICE €/u.
	TOTAL	WORKING	WORKING	BREAKING						
15-20 mm	700 mm	300 mm	750 kg	1,600 kg	2	8	1x19+0	1.0 mm	4.7004.000	75.00
20-25 mm	800 mm	400 mm	750 kg	1,600 kg	2	8	1x19+0	1.0 mm	4.7004.001	90.00
25-45 mm	1300 mm	750 mm	1,500 kg	4,600 kg	2	8	1x19+0	1.5 mm	4.7004.002	100.00
45-60 mm	1,400 mm	900 mm	2,500 kg	5,500 kg	2	8	1x19+0	2.0 mm	4.7004.003	120.00
60-80 mm	1,900 mm	1,200 mm	2,500 kg	5,500 kg	2	8	1x19+0	2.5 mm	4.7004.004	140.00
80-100 mm	2,000 mm	1,300 mm	3,000 kg	6,000 kg	2	8	1x19+0	3.0 mm	4.7004.005	165.00

* Other sizes and formats available to order