

LARGE DIAMETERS

LENGTH UP TO 300 m

Anguila

COATED STEEL


INTERCHANGEABLE TERMINALS



FISH TAPE FLAT BAND STEEL + POLYPROPYLENE						
Ø DIAMETER	LENGTH	CONTAINER	WEIGHT kg.	COLOUR	REF.	ACC. INCLUDED
10 mm	40 m	H720	12.10		2.1004.040	F+G
	50 m	H720	13.60		2.1004.050	
	60 m	H720	15.10		2.1004.060	
Ø DIAMETER	LENGTH	CONTAINER	WEIGHT kg.	COLOUR	REF.	ACC. INCLUDED
10 mm	60 m	VH800	18.20		2.1015.060	F+G
	80 m	VH800	21.10		2.1015.080	
	100 m	VH800	24.00		2.1015.100	
	120 m	VH800	26.95		2.1015.120	
	150 m	VH800	31.40		2.1015.150	

COATED FIBREGLASS ROD

INTERCHANGEABLE TERMINALS

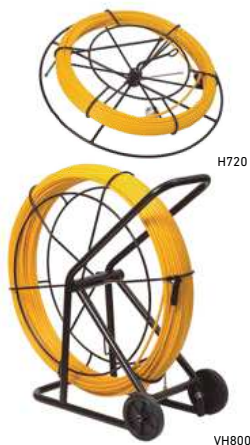

FISH TAPE FIBREGLASS + POLYPROPYLENE						
Ø DIAMETER	LENGTH	CONTAINER	WEIGHT kg.	COLOUR	REF.	ACC. INCLUDED
9 mm	40 m	H720	10.00		3.0904.040	F+H
	50 m	H720	11.00		3.0904.050	
	60 m	H720	12.00		3.0904.060	
Ø DIAMETER	LENGTH	CONTAINER	WEIGHT kg.	COLOUR	REF.	ACC. INCLUDED
9 mm	50 m	VH800	14.10		3.0915.050	F+H
	60 m	VH800	15.10		3.0915.060	
	80 m	VH800	16.70		3.0915.080	
	100 m	VH800	19.00		3.0915.100	
	120 m	VH800	21.05		3.0915.120	
	150 m	VH800	23.90		3.0915.150	
	180 m	VH800	26.95		3.0915.180	

ACCESSORIES INCLUDED

F	1x Flexible Pulling Head, Ø 14 mm, M12 REF. 4.1004.000
G	1x Aluminium Head Ø 30 mm M12 REF. 4.2007.000
H	1x Aluminium Head Ø 53 mm M12 REF. 4.2003.000



Anguila

COATED FIBREGLASS ROD

INTERCHANGEABLE TERMINALS



FISH TAPE FIBREGLASS + POLYPROPYLENE						
Ø DIAMETER	LENGTH	CONTAINER	WEIGHT kg.	COLOUR	REF.	ACC. INCLUDED
11 mm	40 m	VH800	14.80		3.1115.040	F+H
	50 m	VH800	16.30		3.1115.050	
	60 m	VH800	17.80		3.1115.060	
	80 m	VH800	20.85		3.1115.080	
	100 m	VH800	23.90		3.1115.100	



Ø DIAMETER	LENGTH	CONTAINER	WEIGHT kg.	COLOUR	REF.	ACC. INCLUDED
11 mm	120 m	VH1000	32.65		3.1118.120	F+H
	150 m	VH1000	37.15		3.1118.150	
	200 m	VH1000	44.60		3.1118.200	
	250 m	VH1000	52.00		3.1118.250	
	300 m	VH1000	59.45		3.1118.300	

Ø 14 mm, available to order

NOTES:

- Fibreglass is a delicate material and can easily break. Use carefully avoiding excessive looping, kinking and folding.
- For your safety and better handling of the product we recommend you always use a container for lengths over 40 m.